


USB nomenclature

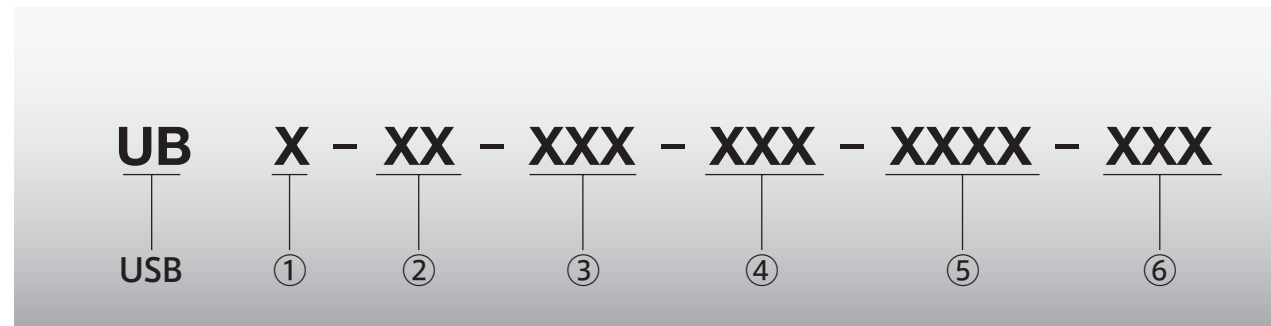

① Category	Code	Description
	2	Ver 2.0
	3	Ver 3.0

② Cable type	Code	Description
	ST	Standard specification
	HF	High flex specification

* Low particle type include XX(LP) to end of the mark. Please contact us because we may not be able to support you depending on some type of cables.

③ Connector specification for the CN1 side (grabber board)	Code	Description
	SA0	Standard A-Type
	SB0	Standard B-Type
	MB0	Micro B-Type
	SAS	Standard A-Type with Screw
	SAS(A)	Standard A-Type with Single Screw(Right Angle)
	SAS(B)	Standard A-Type with Single Screw(Left Angle)
	SAS(C)	Standard A-Type with Single Screw(Upper Angle)
	SAS(D)	Standard A-Type with Single Screw(Lower Angle)
	SBS	Standard B-Type with Screw
	MBS	Micro B-Type with Screw
	MBU	Micro B-Type with Screw Upper Angle
	MBD	Micro B-Type with Screw Lower Angle
	MBR	Micro B-Type with Screw Right Angle
MBL	Micro B-Type with Screw Left Angle	

* Type-A is the left and right side with screw.
It will correspond to the custom specifications of the FG board manufacturers about up and down side with screw.
Please contact us about attaching screw size and position.



④ Connector specification for the CN2 side (camera)	Code	Description
	SA0	Standard A-Type
	SB0	Standard B-Type
	MB0	Micro B-Type
	SAS	Standard A-Type with Screw
	SAS(A)	Standard A-Type with Single Screw(Right Angle)
	SAS(B)	Standard A-Type with Single Screw(Left Angle)
	SAS(C)	Standard A-Type with Single Screw(Upper Angle)
	SAS(D)	Standard A-Type with Single Screw(Lower Angle)
	SBS	Standard B-Type with Screw
	MBS	Micro B-Type with Screw
	MBU	Micro B-Type with Screw Upper Angle
	MBD	Micro B-Type with Screw Lower Angle
	MBR	Micro B-Type with Screw Right Angle
MBL	Micro B-Type with Screw Left Angle	

⑤ L Length	Code	Description
	0050	0.5m
	0100	1.0m
	0150	1.5m
	0200	2.0m
	0250	2.5m
	0300	3.0m
	* Please contact us if a cable with a different length is needed.	

⑥ Jacket color	Code	Description
	00K	Black (default color)
* Please contact us if a cable with a different color is needed.		

* Please contact us. We are able to make low particle jackets.

(Note)

The USB3.0 specifications have a transmission distance stipulation.

Products beyond the stipulated length will be quoted as a custom product for a separate order.

Please contact your sales consultant.